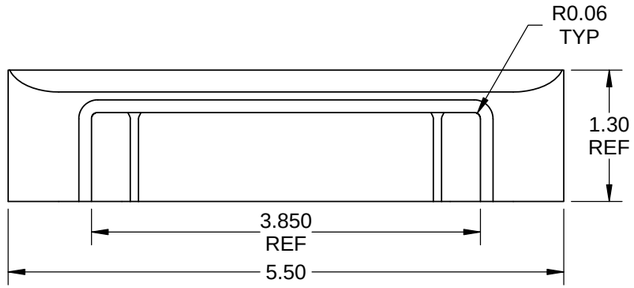

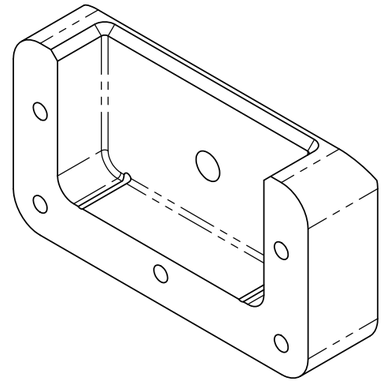

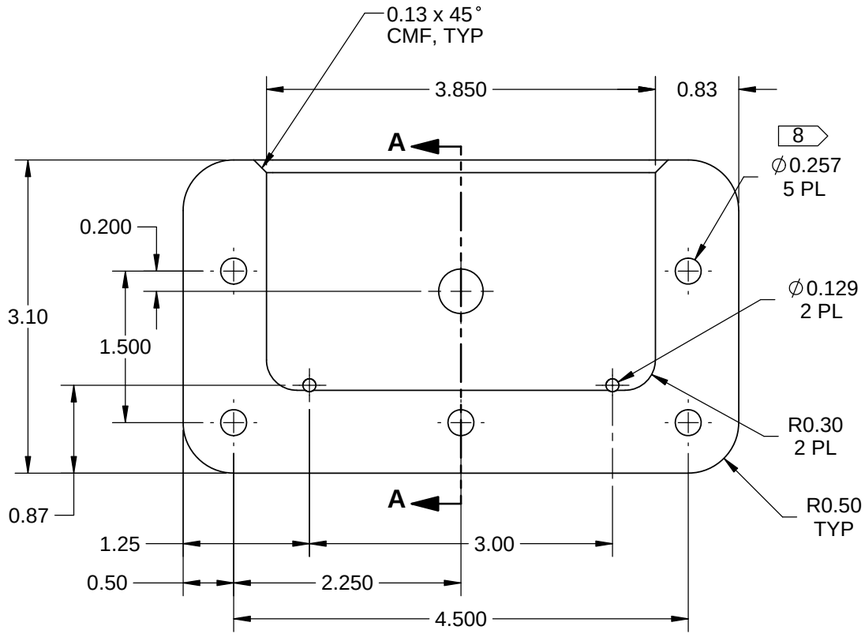

D5553-1 BRACKET

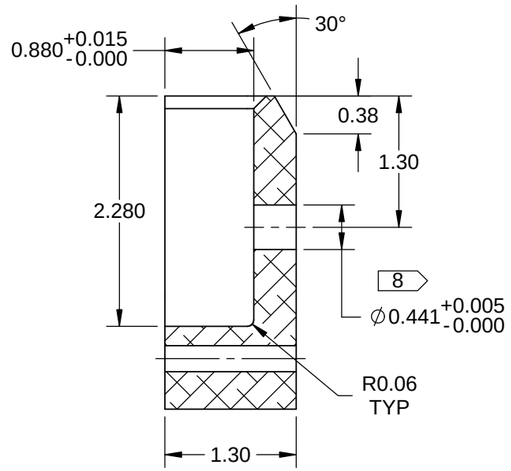

SECTION A-A

NOTES:
1) MATERIAL: 6061-T6/T651/T6510/T6511/T62 ALUMINUM BAR
PER QQ-A-225/8 OR AMS-QQ-A-225/8 (OR AMS 4117/4128/4115/4116)
OR QQ-A-200/8 OR AMS-QQ-A-200/8 (OR AMS 4160)
OR ASTM B211 OR ASTM B221
REF DART SPEC M6061T6B
2) FINISH: CHEMICAL CONVERSION COAT PER DART QSI 005 4.1
POWDER COAT WHITE (4.3.5.1) PER DART QSI 005 4.3
3) TOLERANCES: PER DART QSI 018 UNLESS OTHERWISE NOTED
4) UNITS: INCHES UNLESS OTHERWISE NOTED
5) BREAK SHARP EDGES: 0.005 TO 0.010 MAX
6) IDENTIFICATION: N/A
7) WEIGHT: 1.32 lbs
8) MASK HOLES PRIOR TO POWDER COAT

APPROVED BY DESIGN MANAGER

REV.	DESCRIPTION	BY	DATE
A	NEW ISSUE	RF	17.07.24

DESIGN	RF	**DART AEROSPACE USA, INC.** EUGENE, OR
DRAWN	RF	
CHECKED	WK	DRAWING NO. D5553 REV. A
MFG. APPR.	JFS	SHEET 1 OF 1
APPROVED	HS	TITLE BRACKET SCALE NTS
DE APPR.		
DATE	17.07.24	

COPYRIGHT © 2017 BY DART AEROSPACE USA, INC.
THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE USA, INC.